


pole position



orion

unique in performance & design

- Countertop system for teller use
- Small footprint, complete functionality
- A wide choice of options
- Outstanding serviceability
- Affordable and easy-to-use

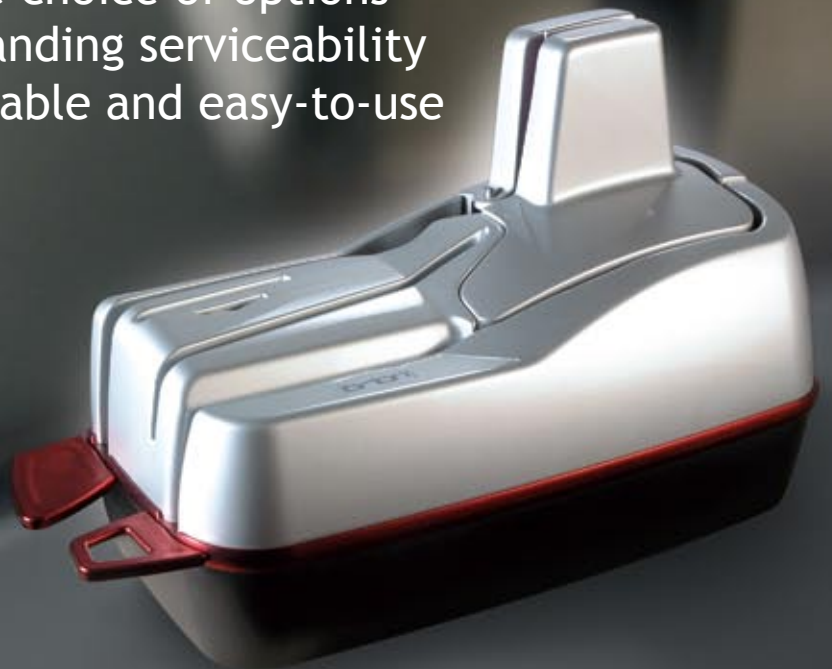

The **Seac Banche Orion** is designed to simplify the processing of cheques and other documents at the point of presentation.

This unique reader scanner is the logical development to provide the functionality and performance normally found in devices too big for modern teller positions in a unit with the same footprint of a check reader.

The easy-to-use **Orion** brings to the quality of image capture and read performance of the **SB 1500** the benefits of additional flexibility and automatic feeding, allowing tellers to devote their attention to the customer rather than to manually feeding the documents. This capability is particularly valuable when transactions with several cheques or documents are presented. A wide range of options - including colour imaging, voiding/endorsing functionalities and card management - further enhance its flexibility and broaden its scope of use.



PAPER HANDLING

Autofeeder with a capacity of up to 35* documents
Double feed control
Output stacker: capacity approx. 35* documents
Transport speed: 560 mm (22")/sec
Throughput options: drop feed, 65 dpm, 130 dpm

DOCUMENT SPECIFICATIONS

Width: 100 to 225 mm (3.94" to 8.86")
Height: 52 to 108 mm (2.05" to 4.25")
Weight: 70 to 120 g/sqm (18.7 to 32 lbs)

CODELINE READING

MICR: magnetic fonts CMC7 and E13B
OCR (*optional*): optical fonts OCR-A, OCR-B, OCR-A-B, OCR alphanumeric, E13B
Barcode reading (*optional*)
Additional deco capabilities (2D barcode, multiple snippets - *optional*)

IMAGE CAPTURE

Front and rear images in one pass (duplex)
Red dropout imaging available
200 x 200 dpi or 100 x 100 dpi
Higher resolution available for 2D barcode decoding
256 or 16 grey levels or colour 64K (*optional*)


IMAGE FORMAT

Bitmap, Jpeg, Tiff, G4 (B/W)

INTERFACE

USB 2.0
RS-232 (codeline reader emulation)

API SOFTWARE TOOLS

 Designed for MS Windows XP
Available for MS Windows 2000, 95/98/ME Vista

DIMENSIONS

Length: 260 mm (10.2")
Width: 120 mm (4.7")
Height: 180 mm (7.1")
Weight: 1.7 Kg (3.7 lbs)

COMPONENT

Antifraud feature by UV light

Rear Inkjet Printer (*optional*)

Programmable endorser, application controlled
High-capacity cartridge, 1-line, 96 dpi
Line of data can extend to full width of document

Front Stamp (*optional*)

Self-inking cancellation stamp
Max. dimensions: 22 x 16 mm (0.6 x 0.9")

Magnetic badge reader (*optional*)

Manual swipe reader Tracks 1&2 or 2&3

Chip memory card (*optional*)

"Dip" reader/writer integrated in the reader scanner (Not available)

Secure Digital card (*optional*)

For image/data storage in stand-alone operation (Not available)

* depending on the paper's thickness.
* depending on the length of the document.

Seac Banche S.p.A. Headquarter

Via Francesco Petrarca, 14 - 50041 Calenzano (FI), Italy
Tel.: +39 055.8870700 - Fax: +39 055.8873646
E-Mail: info@seacbanche.com - Web site: www.seacbanche.com

Seac Banche S.p.A. USA

5240 Snapfinger Park Drive - Suite 150 - Decatur, GA 30035 - USA
Tel.: +1 678.5181314/15 - Fax: +1 678.5181316
E-Mail: infousa@seacbanche.com

